



45° T-PIECE

TVE 45/TVL 45




Version with gasket
TVL45



MATERIAL

- galvanized steel
- EPDM rubber gasket (TVL 45)

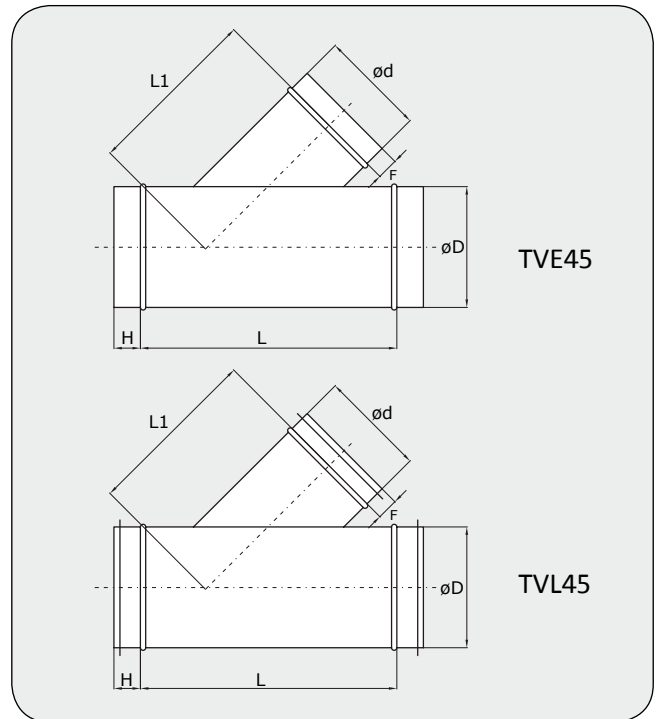

PRODUCT CHARACTERISTICS

- stitch welded
- take-off is fitted with button locks
- gasket (TVL 45) is positioned by returned edges

øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45		TVL 45	
					L1 (mm)	L1 (mm)	L1 (mm)	L1 (mm)
80	80	181	40	40	129	127		
100	80	181	40	40	143	141		
100	100	209	40	40	153	151		
125	80	181	40	40	160	158		
125	100	209	40	40	170	168		
125	125	245	40	40	183	181		
140	80	181	40	40	171	169		
140	100	209	40	40	181	179		
140	125	245	40	40	193	191		
140	140	266	40	40	201	199		
150	80	181	40	40	178	176		
150	100	209	40	40	188	186		
150	125	245	40	40	201	199		
150	140	266	40	40	208	206		
150	150	280	40	40	213	211		
160	80	181	40	40	185	183		
160	100	209	40	40	195	193		
160	125	245	40	40	208	206		

øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45		TVL 45	
					L1 (mm)	L1 (mm)	L1 (mm)	L1 (mm)
160	140	266	40	40	215	213		
160	150	280	40	40	220	218		
160	160	294	40	40	225	223		
180	80	181	40	40	199	197		
180	100	209	40	40	209	207		
180	125	245	40	40	222	220		
180	140	266	40	40	229	227		
180	150	280	40	40	234	232		
180	160	294	40	40	239	237		
180	180	323	40	40	249	247		
200	80	181	40	40	213	211		
200	100	209	40	40	223	221		
200	125	245	40	40	236	234		
200	140	266	40	40	243	241		
200	150	280	40	40	248	246		
200	160	294	40	40	253	251		
200	180	323	40	40	263	261		
200	200	351	40	40	273	271		



Round fittings

øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45	TVL 45
					L1 (mm)	L1 (mm)
224	80	181	40	40	230	228
224	100	209	40	40	240	238
224	125	245	40	40	253	251
224	140	266	40	40	260	258
224	150	280	40	40	265	263
224	160	294	40	40	270	268
224	180	323	40	40	280	278
224	200	351	40	40	290	288
224	224	385	40	40	302	300
250	100	209	40	40	259	257
250	125	245	40	40	271	269
250	140	266	40	40	279	277
250	150	280	40	40	284	282
250	160	294	40	40	289	287
250	180	323	40	40	299	297
250	200	351	40	40	309	307
250	224	385	40	40	321	319
250	250	422	40	40	334	332
280	100	209	40	40	280	278
280	125	245	40	40	292	290
280	140	266	40	40	300	298
280	150	280	40	40	305	303
280	160	294	40	40	310	308
280	180	323	40	40	320	318
280	200	351	40	40	330	328
280	224	385	40	40	342	340
280	250	422	40	40	355	353
280	280	464	40	40	370	368
300	100	209	40	40	294	292
300	125	245	40	40	307	305
300	140	266	40	40	314	312
300	150	280	40	40	319	317
300	160	294	40	40	324	322
300	180	323	40	40	334	332
300	200	351	40	40	344	342
300	224	385	40	40	356	354
300	250	422	40	40	369	367
300	280	464	40	40	384	382
300	300	492	40	40	394	392
315	100	209	40	40	305	303
315	125	245	40	40	317	315
315	140	266	40	40	325	323
315	150	280	40	40	330	328
315	160	294	40	40	335	333
315	180	323	40	40	345	343
315	200	351	40	40	355	353
315	224	385	40	40	367	365
315	250	422	40	40	380	378

øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45	TVL 45
					L1 (mm)	L1 (mm)
315	280	464	40	40	395	393
315	300	492	40	40	405	403
315	315	513	40	40	412	410
355	125	245	40	40	346	344
355	140	266	40	40	353	351
355	150	280	40	40	358	356
355	160	294	40	40	363	361
355	180	323	40	40	373	371
355	200	351	40	40	383	381
355	224	385	40	40	395	393
355	250	422	40	40	408	406
355	280	464	40	40	423	421
355	300	492	40	40	433	431
355	315	513	40	40	441	439
355	355	570	40	40	461	459
400	125	245	40	40	377	375
400	140	266	40	40	385	383
400	150	280	40	40	390	388
400	160	294	40	40	395	393
400	180	323	40	40	405	403
400	200	351	40	40	415	413
400	224	385	40	40	427	425
400	250	422	40	40	440	438
400	280	464	40	40	455	453
400	300	492	40	40	465	463
400	315	513	40	40	472	470
400	355	570	40	40	492	490
400	400	634	40	40	515	525
450	160	304	50	40	430	428
450	180	333	50	40	440	438
450	200	361	50	40	450	448
450	224	395	50	40	462	460
450	250	432	50	40	475	473
450	280	474	50	40	490	488
450	300	502	50	40	500	498
450	315	523	50	40	508	506
450	355	580	50	40	528	526
450	400	644	50	40	550	560
450	450	714	50	50	585	585
500	200	361	50	40	486	484
500	224	395	50	40	498	496
500	250	432	50	40	511	509
500	280	474	50	40	526	524
500	300	502	50	40	536	534
500	315	523	50	40	543	541
500	355	580	50	40	563	561
500	400	644	50	40	586	596
500	450	714	50	50	621	621



øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45	TVL 45
					L1 (mm)	L1 (mm)
500	500	785	50	50	646	646
560	200	361	60	40	528	526
560	224	395	60	40	540	538
560	250	432	60	40	553	551
560	280	474	60	40	568	566
560	300	502	60	40	578	576
560	315	523	60	40	585	583
560	355	580	60	40	605	603
560	400	644	60	40	628	638
560	450	714	60	50	663	663
560	500	785	60	50	688	688
560	560	870	60	60	708	708

øD (mm)	ød (mm)	L (mm)	H (mm)	F (mm)	TVE 45	TVL 45
					L1 (mm)	L1 (mm)
630	200	361	60	40	577	575
630	224	395	60	40	589	587
630	250	432	60	40	602	600
630	280	474	60	40	617	615
630	300	502	60	40	627	625
630	315	523	60	40	635	633
630	355	580	60	40	655	653
630	400	644	60	40	677	687
630	450	714	60	50	712	712
630	500	785	60	50	737	737
630	560	870	60	60	757	757
630	630	969	60	60	792	792